


Drum flap maintenance

Lubricate the discharge drum flap in the machines presented below every 150 hours of operation (same as drum bearings). For lubrication using a grease gun, please use grease suitable for contact with high temperatures above 250 °C.

SR25 Coffed Roaster

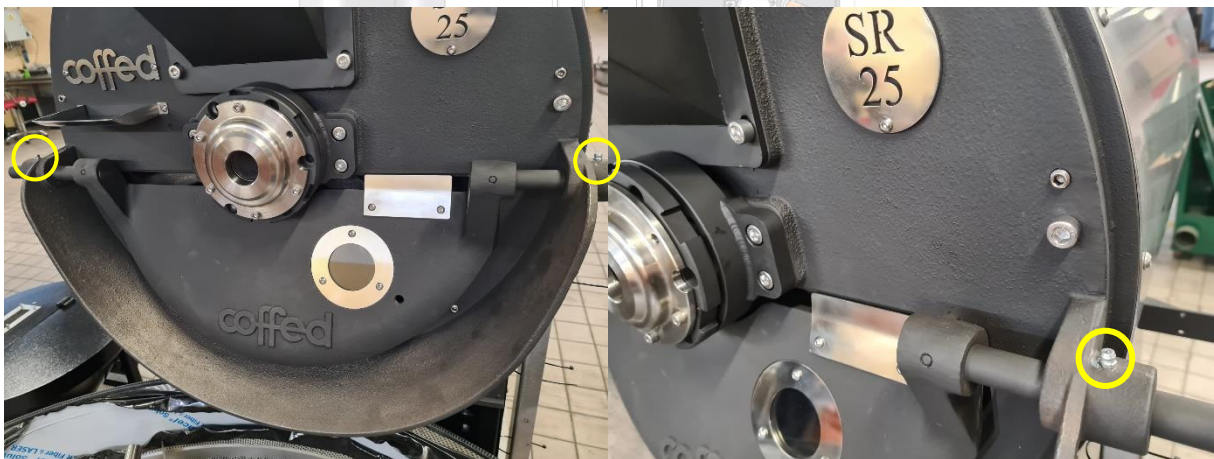

SR30 Coffed Roaster



SR60 Coffed Roaster



SR120 Coffed Roaster

